

SUBSURFACE WASTEWATER DISPOSAL SYSTEM APPLICATION

Maine Dept. Health & Human Services
Div Environmental Health, 11 SHS
(207) 287-2070 FAX (207) 287-4172

PROPERTY LOCATION		>>CAUTION: LPI APPROVAL REQUIRED<<	
City, Town, or Plantation	BOWDOINHAM	Town/City _____	Permit # _____
Street or Road	8 RIVER ROAD	Date Permit Issued ___/___/___	Fee \$ _____ Double Fee Charged []
Subdivision, Lot #			L.P.I.# _____
OWNER/APPLICANT INFORMATION		Local Plumbing Inspector Signature	
Name (last, first, MI)	<input checked="" type="checkbox"/> Owner TOWN OF BOWDOINHAM <input type="checkbox"/> Applicant	Fee \$ _____ state min. fee \$ _____	Locally Adopted Fee _____
Mailing Address of Owner/Applicant	C/O YVETTE MEUNIER DIRECTOR OF PLANNING AND DEVELOPEMENT TOWN OF BOWDOINHAM	The Subsurface Wastewater Disposal System shall not be installed until a Permit is issued by the Local Plumbing Inspector. The Permit shall authorize the owner or installer to install the disposal system in accordance with this application and the Maine Subsurface Wastewater Disposal Rules.	
Daytime Tel. #	666-3096	Municipal Tax Map # <u>0-1</u> Lot # <u>1</u>	
OWNER OR APPLICANT STATEMENT		CAUTION: INSPECTION REQUIRED	
I state and acknowledge that the information submitted is correct to the best of my knowledge and understand that any falsification is reason for the Department and/or Local Plumbing Inspector to deny a permit.		I have inspected the installation authorized above and found it to be in compliance with the Subsurface Wastewater Disposal Rules Application.	
Signature of Owner/Applicant _____		Local Plumbing Inspector Signature _____	
Date _____		(1st) Date Approved _____	
		(2nd) Date Approved _____	


PERMIT INFORMATION			
TYPE OF APPLICATION <input checked="" type="checkbox"/> 1. First Time System <input type="checkbox"/> 2. Replacement System Type Replaced: _____ Year Installed: _____ <input type="checkbox"/> 3. Expanded System <input type="checkbox"/> a. <25% Expansion <input type="checkbox"/> b. >25% Expansion <input type="checkbox"/> 4. Experimental System <input type="checkbox"/> 5. Seasonal Conversion	LEGAL DEED EASEMENT NEEDED TO CROSS ROUTE 24 WITH EFFLUENT LINE AND TO ALLOW THIS APPLICATION REQUIRES EXISTING RESTROOM TO UTILIZE DISPOSAL AREA ON LOT 1 <input checked="" type="checkbox"/> 1.No Rule Variance <input type="checkbox"/> 2.First Time System Variance <input type="checkbox"/> a. Local Plumbing Inspector Approval <input type="checkbox"/> b. State & Local Plumbing Inspector Approval <input type="checkbox"/> 3.Replacement System Variance <input type="checkbox"/> a. Local Plumbing Inspector Approval <input type="checkbox"/> b. State & Local Plumbing Inspector Approval <input type="checkbox"/> 4.Minimum Lot Size Variance <input type="checkbox"/> 5.Seasonal Conversion Permit	DISPOSAL SYSTEM COMPONENTS <input checked="" type="checkbox"/> 1. Complete Non-Engineered System <input type="checkbox"/> 2. Primitive System(graywater & alt toilet) <input type="checkbox"/> 3. Alternative Toilet, specify: _____ <input type="checkbox"/> 4. Non-Engineered Treatment Tank (only) <input type="checkbox"/> 5. Holding Tank, _____ gallons <input type="checkbox"/> 6. Non-Engineered Disposal Field (only) <input type="checkbox"/> 7. Separated Laundry System <input type="checkbox"/> 8. Complete Engineered System(2000gpd+) <input type="checkbox"/> 9. Engineered Treatment Tank (only) <input type="checkbox"/> 10. Engineered Disposal Field (only) <input type="checkbox"/> 11. Pre-treatment, specify: _____ <input type="checkbox"/> 12. Miscellaneous components	
SIZE OF PROPERTY +/- <u>2</u> <input type="checkbox"/> SQ. FT. <input checked="" type="checkbox"/> ACRES	DISPOSAL SYSTEM TO SERVE <input type="checkbox"/> 1. Single Family Dwelling Unit, No. of Bedrooms: _____ <input type="checkbox"/> 2. Multiple Family Dwelling, No of Units: _____ <input checked="" type="checkbox"/> 3. Other: PUBLIC RESTROOMS (specify) Current Use <input type="checkbox"/> Seasonal <input type="checkbox"/> Year Round <input checked="" type="checkbox"/> Undeveloped		
SHORELAND ZONING <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	TYPE OF WATER SUPPLY <input checked="" type="checkbox"/> 1. Drilled Well <input type="checkbox"/> 2. Dug Well <input type="checkbox"/> 3. Private <input type="checkbox"/> 4. Public <input type="checkbox"/> 5. Other: _____		

DESIGN DETAILS (SYSTEM LAYOUT SHOWN ON PAGE 3)			
2 TREATMENT TANKS <input checked="" type="checkbox"/> 1. Concrete (X) EXISTING <input checked="" type="checkbox"/> a. Regular (X) PROPOSED <input type="checkbox"/> b. Low Profile <input type="checkbox"/> 2. Plastic <input type="checkbox"/> 3. Other: _____ CAPACITY: <u>2-1,500's</u> GAL. SEE NOTE ON PAGE 3	DISPOSAL FIELD TYPE & SIZE <input type="checkbox"/> 1. Stone Bed <input type="checkbox"/> 2. Stone Trench <input checked="" type="checkbox"/> 3. Proprietary Device <input checked="" type="checkbox"/> a. Cluster array <input type="checkbox"/> c.Linear <input type="checkbox"/> b. Regular <input type="checkbox"/> d. H-20 loaded <input type="checkbox"/> 4. Other: _____ SIZE: <u>8064</u> sq. ft. <input type="checkbox"/> lin. ft. <u>126</u> CONCRETE CHAMBER UNITS	GARBAGE DISPOSAL UNIT <input checked="" type="checkbox"/> 1. No <input type="checkbox"/> 2. Yes <input type="checkbox"/> 3. Maybe If Yes or Maybe, specify one below: <input type="checkbox"/> a. Multi-compartment tank <input type="checkbox"/> b. _____ tanks in series <input type="checkbox"/> c. Increase in tank capacity <input type="checkbox"/> d. Filter on tank outlet	DESIGN FLOW <u>1,600</u> gallons per day BASED ON: <input type="checkbox"/> 1. Table 5A (dwelling unit(s)) <input checked="" type="checkbox"/> 2. Table 5C (other facilities) SHOW CALCULATIONS for other facilities I EXISTING PUBLIC RESTROOM & I PROPOSED PUBLIC RESTROOM AT 300 GALLON PER DAY EACH OR 100 USERS PER DAY
SOIL DATA & DESIGN CLASS PROFILE CONDITION <u>9 / D</u> at Observation Hole # <u>TP 1</u> Depth <u>10</u> " of Most Limiting Soil Factor	DISPOSAL FIELD SIZING <input type="checkbox"/> 1. Medium - 2.6 sq.ft./gpd <input type="checkbox"/> 2. Medium-Large - 3.3 sq.ft./gpd <input type="checkbox"/> 3. Large - 4.1 sq.ft./gpd <input checked="" type="checkbox"/> 4. Extra-Large - 5.0 sq.ft./gpd		2 PUMP STATIONS EFFLUENT/EJECTOR PUMP (TO BE DESIGNED BY OTHERS) <input type="checkbox"/> 1. Not required <input type="checkbox"/> 2. May be required <input checked="" type="checkbox"/> 3. Required 6' DIA Specify only for engineered systems: SEE NOTE ON PAGE 3 DOSE: _____ gallons
LATITUDE AND LONGITUDE at center of disposal area Lat. <u>N44</u> d <u>0</u> m <u>22.11</u> s Lon. <u>W69</u> d <u>53</u> m <u>55.57</u> s if g.p.s., state margin of error			

SITE EVALUATOR STATEMENT		
I certify that on <u>4/22/25</u> (date) I completed a site evaluation on this property and state that the data reported are accurate and that the proposed system is in compliance with the Subsurface Wastewater Disposal Rules (10-144A CMR 241).		
Site Evaluator Signature BRADY A. FRICK Site Evaluator Name Printed	352 SE # (207) 839-5563 Telephone Number	5/9/25 Date INFO@ALBERTFRICK.COM E-mail Address
ALBERT FRICK ASSOCIATES - 731 FOSS ROAD, LIMERICK, MAINE 04048 - (207) 839-5563 Note: Changes to or deviations from the design should be confirmed with the Site Evaluator		

SUBSURFACE WASTEWATER DISPOSAL SYSTEM APPLICATION

Department of Health and Human Services
 Division of Environmental Health
 (207) 287-2070 FAX (207) 287-4172

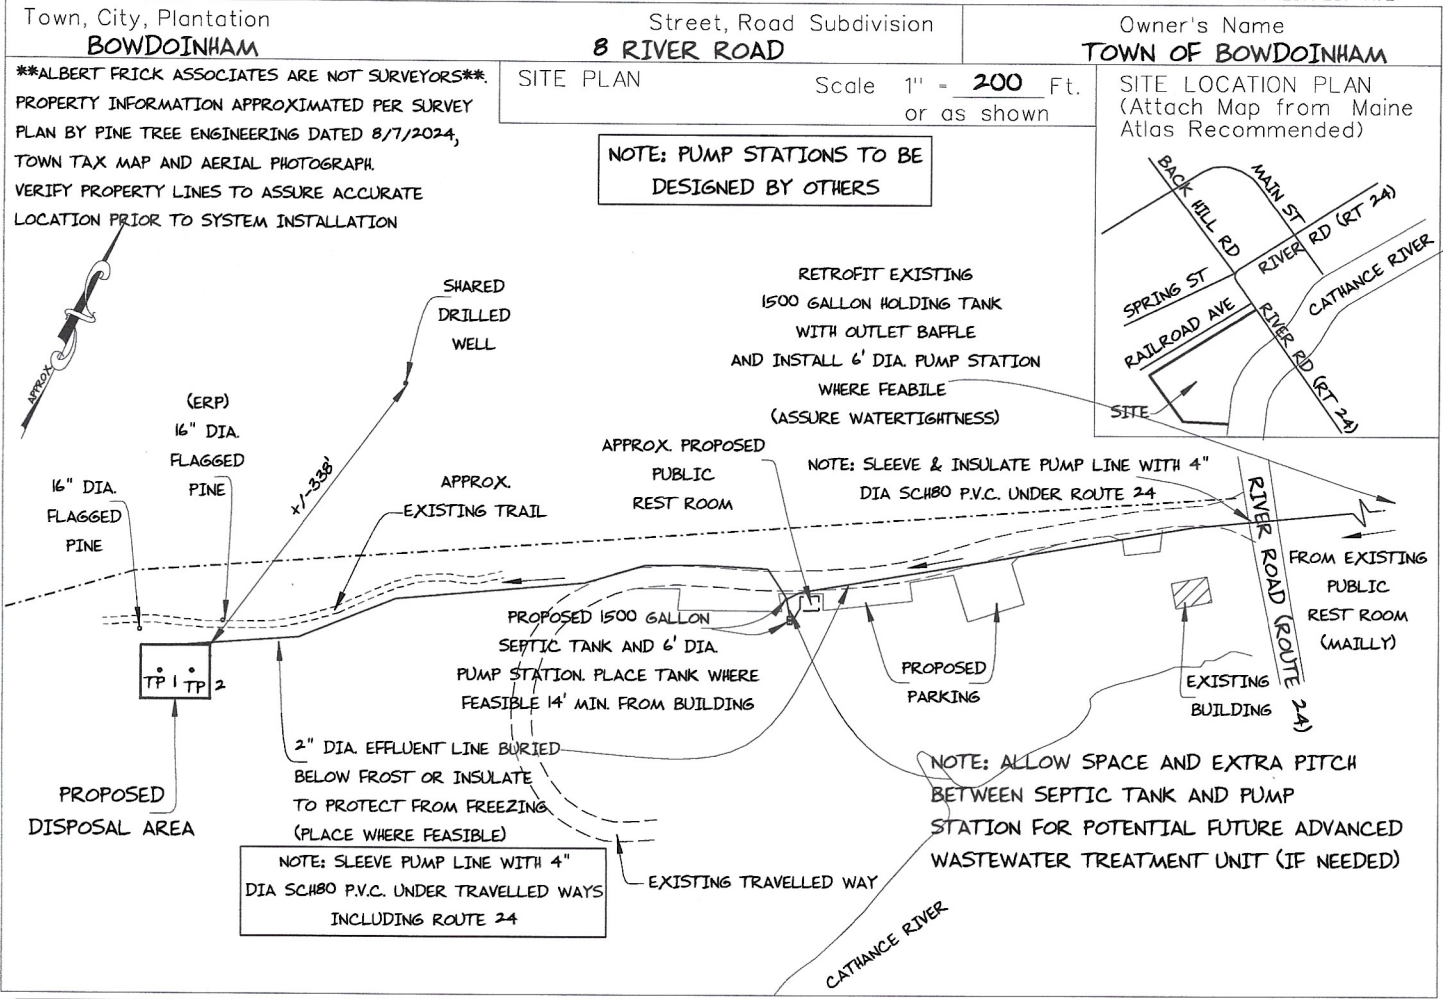

SOIL DESCRIPTION AND CLASSIFICATION (Location of Observation Holes Shown Above)

Observation Hole TP 1 Test Pit Boring
 " Depth of Organic Horizon Above Mineral Soil

DEPTH BELOW MINERAL SOIL SURFACE (inches)	Texture	Consistency	Color	Mottling
0				
10	SILT LOAM	FRIABLE	BROWN	FEW, FAINT
20		FIRM	OLIVE BROWN	
30				
40				
50				

Soil Classification	Slope	Limiting Factor	<input checked="" type="checkbox"/> Ground Water
<u>9</u> Profile	<u>D</u> Condition	<u>10</u> "	<input type="checkbox"/> Restrictive Layer
	<u>0-3</u> %		<input type="checkbox"/> Bedrock
			<input type="checkbox"/> Pit Depth

Observation Hole TP 2 Test Pit Boring
 " Depth of Organic Horizon Above Mineral Soil

DEPTH BELOW MINERAL SOIL SURFACE (inches)	Texture	Consistency	Color	Mottling
0				
10	SILT LOAM	FRIABLE	BROWN	FEW, FAINT
20		FIRM	OLIVE BROWN	
30				
40				
50				

Soil Classification	Slope	Limiting Factor	<input checked="" type="checkbox"/> Ground Water
<u>9</u> Profile	<u>D</u> Condition	<u>10</u> "	<input type="checkbox"/> Restrictive Layer
	<u>0-3</u> %		<input type="checkbox"/> Bedrock
			<input type="checkbox"/> Pit Depth

Brady A. Frick
 Site Evaluator Signature


352
 SE #

5/9/25
 Date

Page 2 of 3
 HHE-200 Rev. 02/11

SUBSURFACE WASTEWATER DISPOSAL SYSTEM APPLICATION

Department of Health and Human Services
 Division of Environmental Health
 (207) 287-2070 FAX (207) 287-4172

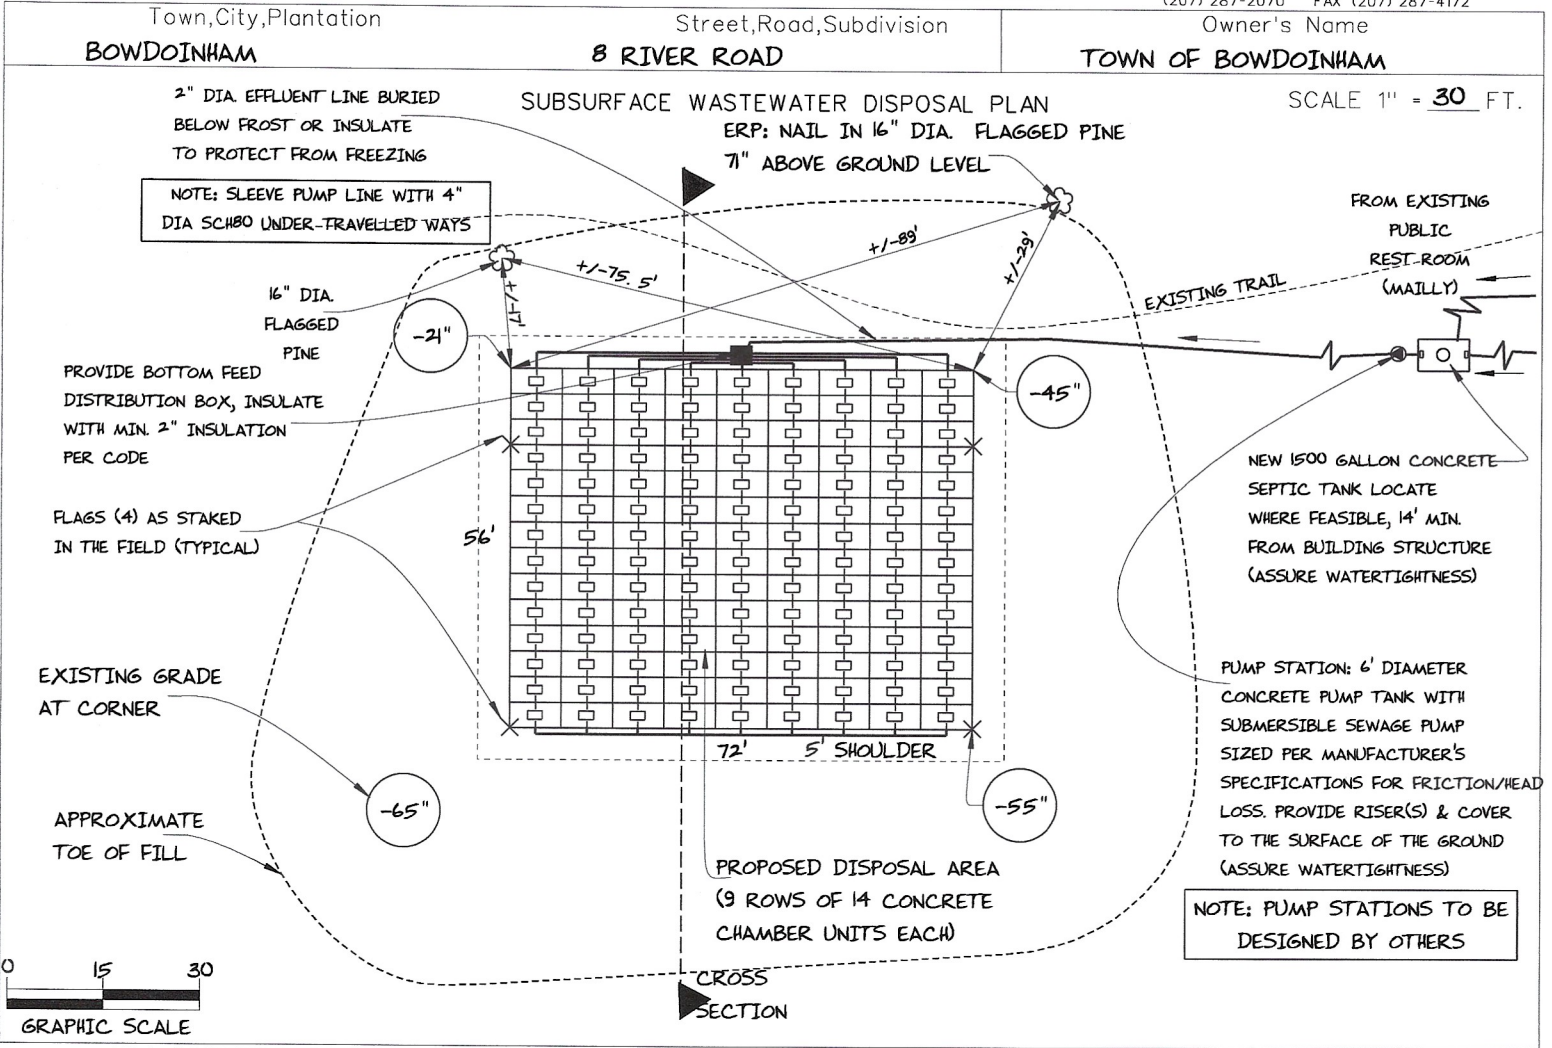

FILL REQUIREMENTS

Depth of Fill (Upslope) : 39" - 63"
 Depth of Fill (Downslope) : 73" - 83"
 DEPTHS AT CROSS-SECTION (shown below)

CONSTRUCTION ELEVATIONS

Finished Grade Elevation
 Top of Distribution Pipe or Proprietary Device
 Bottom of Disposal Area

SEE
 DETAIL
 BELOW


ELEVATION REFERENCE POINT

Location & Description: 16" DIA. FLAGGED PINE, NAIL 7" ABOVE BASE
 Reference Elevation is: 0.0' or -----

NOTE: ASSURE MIN. 4:1 SLOPES ON FILL EXTENSIONS

DISPOSAL AREA CROSS SECTION

SCALE:
 VERTICAL: 1" = 5 FT
 HORIZONTAL: 1" = 20 FT

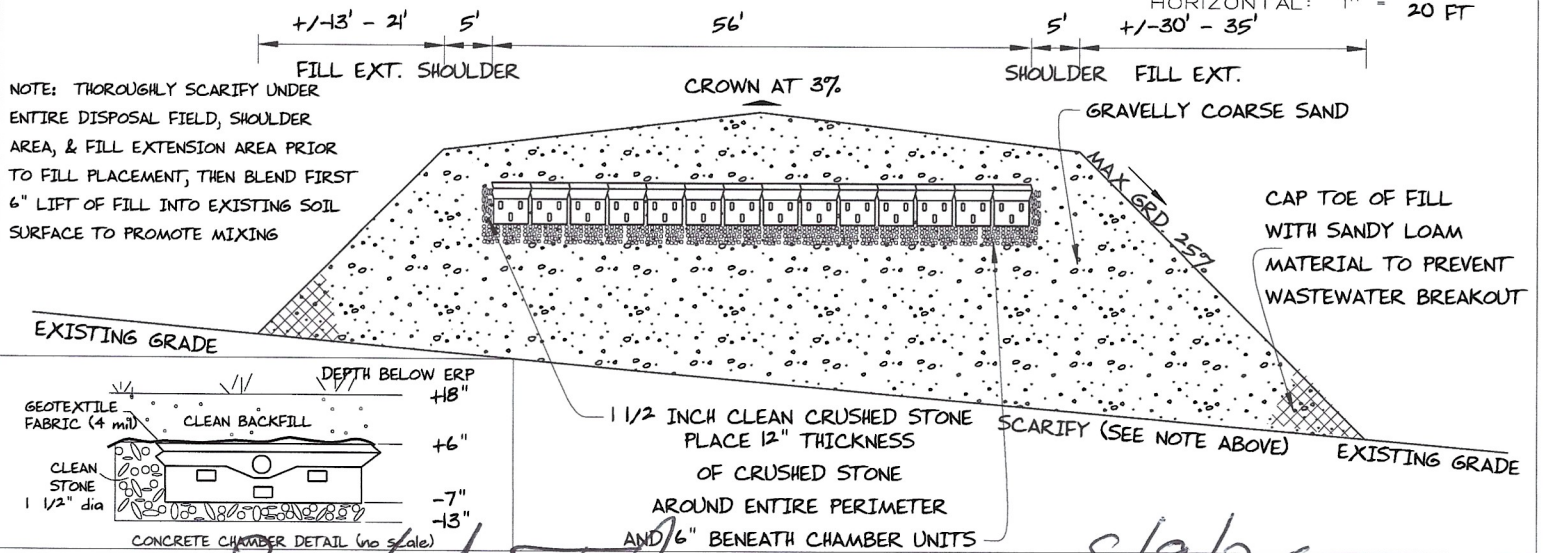

Site Evaluator Signature: *Brad A. [Signature]*

SE # 352

Date: 5/9/25



Albert Frick Associates, Inc.
 731 Foss Road Limerick, Maine 04048
 (207) 839-5563

BOWDOINHAM

8 RIVER ROAD

TOWN OF BOWDOINHAM

TOWN	LOCATION	APPLICANT'S NAME
1)	<p>The Plumbing and Subsurface Wastewater Disposal Rules adopted by the State of Maine, Division of Health and Human Services pursuant to 22 M.R.S.A. § 42 (the "Rules") are incorporated herein by reference and made a part of this application and shall be consulted by the owner/applicant, the system installer and/or building contractor for further construction details and material specifications. The system Installer should contact Albert Frick Associates, Inc. 839-5563, if there are any questions concerning materials, procedures or designs. The system installer and/or building contractor installing the system shall be solely responsible for compliance with the Rules and with all state and municipal laws and ordinances pertaining to the permitting, inspection and construction of subsurface wastewater disposal systems.</p>	
2)	<p>This application is intended to represent facts pertinent to the Rules only. It shall be the responsibility of the owner/applicant, system Installer and/or building contractor to determine compliance with and to obtain permits under all applicable local, state and/or federal laws and regulations (including, without limitation, Natural Resources Protection Act, wetland regulations, zoning ordinances, subdivision regulations, Site Location of Development Act and Minimum Lot Size law) before installing this system or considering the property on which the system is to be installed a "buildable" lot. It is recommended that a wetland scientist be consulted regarding wetland regulations. Prior to the commencement of construction/installation, the local plumbing inspector or Code Enforcement Officer shall inform the owner/applicant and Albert Frick Associates, Inc of any local ordinances which are more restrictive than the Rules in order that the design may be amended. All designs are subject to review by local, state and/or federal authorities. Albert Frick Associates, Inc.'s liability shall be limited to revisions required by regulatory agencies pursuant to laws or regulations in effect at the time of preparation of this application.</p>	
3)	<p>All information shown on this application relating to property lines, well locations, subsurface structures and underground facilities (such as utility lines, drains, septic systems, water lines, etc.) are based upon information provided by the owner/applicant and has been relied upon by Albert Frick Associates, Inc. in preparing this application. The owner/applicant shall review this application prior to the start of construction and confirm this information. Well locations on abutting properties but not readily visible above grade should be confirmed by the owner/applicant prior to system installation to assure minimum setbacks.</p>	
4)	<p>Installation of a garbage (grinder) disposal is not recommended. If one is installed, an additional 1000 gallon septic tank or a septic tank filter shall be connected in series to the proposed septic tank. Risers and covers should be installed over the septic tank outlet per the "Rules" to allow for easy maintenance of filter.</p>	
5)	<p>The septic tank should be pumped within two years of installation and subsequently as recommended by the pump service, but in no event should the septic tank be pumped less often than every three years.</p> <p>The system user shall avoid introducing kitchen grease or fats into this system. Chemicals such as septic tank cleaners and/or chlorine or water treatment backwash and controlled or hazardous substances shall not be disposed of in this system. Additives such as yeast or enzymes are discouraged, since they have not been proven to extend system life.</p>	
6)	<p>All septic tanks, pump stations and additional treatment tanks shall be installed to prevent ground water and surface water infiltration. Risers and covers should be properly installed to provide access while preventing surface water intrusion to finished ground surface.</p> <p>One 18" dia. (min) riser and cover is required over septic tank</p> <p>Vehicular traffic over disposal system is prohibited unless specifically designed with H-20 rated components.</p>	

BOWDOINHAM

8 RIVER ROAD

TOWN OF BOWDOINHAM

TOWN

LOCATION

APPLICANT'S NAME

- 7) The actual waste water flow or number of bedrooms shall not exceed the design criteria indicated on this application without a re-evaluation of the system as proposed
- 8) The general minimum setbacks between a well (public or private) and septic system serving a single family residence is 100-300 feet, unless the local municipality has a more stringent requirement. A well installed by an abutter within the minimum setback distances prior to the issuance of a permit for the proposed disposal system may void this design.
- 9) When a gravity system is proposed: BEFORE CONSTRUCTION/INSTALLATION BEGINS, the system installer or building contractor shall review the elevations of all points given in this application and the elevation of the existing and/or proposed building drain and septic tank inverts for compatibility to minimum pitch requirements. In gravity systems, the invert of the septic tank(s) outlet(s) should be at least 4 inches above the invert of the distribution box outlet at the disposal area.
- 10) When an effluent pump is required: Pump stations should be sized per manufacturer's specifications to meet lift requirements and friction loss. Provisions shall be made to make certain that surface and ground water does not enter the septic tank or pump station, by sealing/grouting all seams and connections, and by placement of a riser and 18" dia. (min.) cover at or above grade.
An alarm device warning of a pump failure shall be installed. Also, when pumping is required of a chamber system, install a 'T' connection in the distribution box and place 3 inches of stone or a splash plate in the first chamber. Insulate gravity pipes, pump lines and the distribution box as necessary to prevent freezing.
- 11) On all systems, remove the vegetation, organic duff and old fill material from under the disposal area and any fill extension. Additional fill beyond indicated on plan may be necessary to replace organic matter. On sites where the proposed system is to be installed in natural soil, scarify the bottom and sides of the excavated disposal area with a rake. Do not use wheeled equipment on the scarified soil surface. For systems installed in fill, scarify the native soil by roto-tilling or scarifying with teeth of backhoe to a depth of at least 8 inches over the entire disposal and fill extension area to prevent glazing and to promote fill bonding. Place fill in loose layers no deeper than 8 inches and compact before placing more fill (this ensures that voids and loose pockets are eliminated to minimize the chance of leakage or differential settling). Do not use wheeled equipment on the scarified soil area until after 12 inches of fill is in place. Keep equipment off proprietary devices. Divert the surface water away from the disposal area by ditching or shallow landscape swales.
- 12) Unless noted otherwise, fill shall be gravelly coarse sand, which contains no more than 5% fines (silt and clay). Crushed stone shall be clean and free of any rock dust from the crushing process.
- 13) Do not install systems on loamy, silty, or clayey soils during wet periods since soil smearing/glazing may seal off the soil interface.
- 14) Seed all filled and disturbed surfaces with perennial grass seed, with 4" min. soil or soil amendment mix suitable for growing, then mulch with hay or equivalent material to prevent erosion. Alternatively, bark or permanent landscape mulch may be used to cover system. Woody trees or shrubs are not permitted on the disposal area or fill extensions.
- 15) If an advanced wastewater treatment unit is part of the design, the system shall be operated and maintained per manufacturer's specifications.



Albert Frick Associates, Inc.
751 Foss Road Limerick, Maine 04048
(207) 859-5563